

1503/102
APPLIED SCIENCE AND
ELECTRICAL PRINCIPLES
June/July 2018
Time: 3 hours



THE KENYA NATIONAL EXAMINATIONS COUNCIL
CRAFT CERTIFICATE IN AUTOMOTIVE ENGINEERING
MODULE I
APPLIED SCIENCE AND ELECTRICAL PRINCIPLES

3 hours

INSTRUCTIONS TO CANDIDATES

You should have the following for this examination:

Answer booklet;

Scientific calculator;

Drawing instruments.

This paper consists of TWO sections; A and B.

Answer FIVE questions by choosing at least TWO questions from each section.

All questions carry equal marks.

Maximum marks for each part of a question are indicated.

Take: $g=9.81 \text{ m/s}^2$

$\mu_0 = 4\pi \times 10^{-7} \text{ H/M}$

Candidates should answer the questions in English.

This paper consists of 6 printed pages.

Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

SECTION A: APPLIED SCIENCE

Answer at least TWO questions from this section.

1. (a) (i) Define the following:

- (I) pressure;
(II) density.

(2 marks)

(ii) State three characteristics of pressure in liquids.

(3 marks)

(b) With the aid of a diagram, explain the principle of transmission of pressure in a hydraulic brake.

(8 marks)

(c) Convert standard atmospheric pressure from mmHg to:

- (i) Newtons per metre square;
(ii) bar.

(7 marks)

(a) Define the following:

- (i) specific heat capacity;
(ii) heat capacity;
(iii) latent heat of fusion.

(3 marks)

(b) A piece of iron of mass 50g and specific heat capacity of 460 J/kg is cooled from 80 °C to 20 °C. Determine the heat produced.

(5 marks)

(c) (i) State the laws of reflection.

(2 marks)

(ii) Explain the following methods of heat transfer:

- (I) radiation;
(II) convection.

(4 marks)

(iii) In an isothermal process, 0.55 m³ of air at a pressure of 101 kN/m² and temperature of 25 °C is compressed to 909 kN/m². Taking the characteristic gas constant, R = 0.288 kJ/kgK, determine the:

- (I) mass of the gas compressed;
(II) final volume of the gas.

(6 marks)

(a) Define the following:

- (i) mechanical advantage;
(ii) velocity.

(2 marks)

(b) Derive an expression of kinetic energy of a body of mass, M, moving from rest to a final velocity, V.

(6 marks)

- (c) A load of 1.26 kN is lifted by means of a pulley block system consisting of three pulleys in the upper block and two pulleys in the lower block. The efficiency of the system at this load is 84%. Determine the:

$$\text{Efficiency} \Rightarrow \frac{M.A.}{V.R.} \times 100\%$$

- (i) velocity ratio; $\Rightarrow \frac{V.R.}{M.A.} = 5$
 (ii) mechanical advantage; $M.A. = \frac{1}{5}$
 (iii) effort required to lift the load.

(6 marks)

- (d) Table 1 shows data obtained from an experiment carried out on a machine to determine the effort (E) required to lift the load (W) for the range of values shown.

Table 1

W (kN)	0	1	2	4	6	8	10
E (kN)	0.11	0.33	0.59	0.11	1.61	2.07	2.62
$\frac{W}{E}$	0	3.03	3.39	36.36	984	3.86	3.82

- (i) complete table 1;
 (ii) plot the graph of E against W.

(2 marks)
 (4 marks)


- (a) Define the following:

- (i) atomic number; \rightarrow This is the atomic number in a element.
 (ii) mass number; \rightarrow Protons + Neutrons.
 (iii) isotope. \rightarrow This is an atom with the same atomic number but different mass number.

(3 marks)

- (b) With the aid of diagrams, describe the following:

- (i) reflection;
 (ii) refraction.

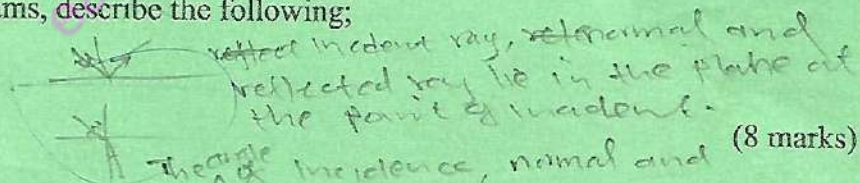

(8 marks)

- (c) A screw jack has a single start thread with a pitch of 3 mm. The load to be raised is 1 tonne. The efficiency at this load is 18%. Determine the torque required at the jack handle to raise the load.

(9 marks)

$$\frac{18}{100} = \frac{1000}{x}$$

$$18x = (100 \times 1000)$$

SECTION B: ELECTRICAL PRINCIPLES

Answer at least **TWO** questions from this section.

5. (a) Define the following:
(i) resistivity;
(ii) conductivity. (2 marks)
- (b) Two copper wires are used to connect a d.c supply to a motor which is 150 m away. The total resistance of the wire used is 0.722Ω and the resistivity of copper is $1.7 \times 10^{-8} \Omega - m$. Determine the diameter of the wire. (5 marks)
- (c) With the aid of a diagram, explain the method of minimizing armature reaction using compensating windings. (7 marks)
- (d) **Figure 1** shows an A.C. series circuit. Determine the impedance of the circuit. (6 marks)

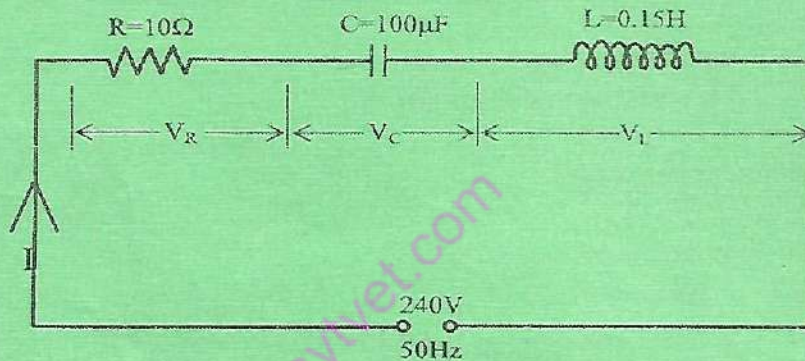


Fig. 1

6. (a) With the aid of chemical equations, describe the process of charging and discharging a lead acid battery. (9 marks)
- (b) **Figure 2** shows three capacitors connected in series to a d.c supply. Determine the:
(i) total capacitance;
(ii) charge stored on each capacitor;
(iii) p.d across capacitor C_2 ;
(iv) energy stored in capacitors C_3 . (8 marks)

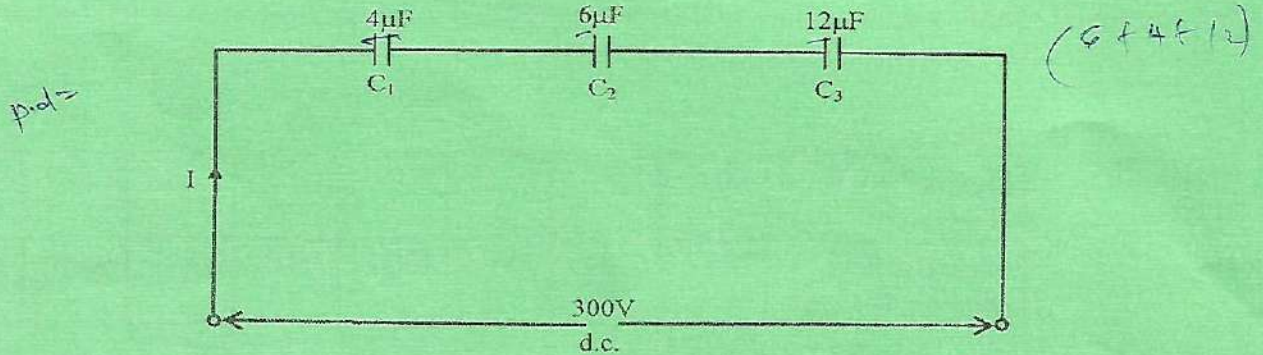


Fig. 2

- (c) Table 2 shows the bands of a colour coded resistor. Determine its resistance.

Table 2

1 st Band	2 nd Band	3 rd Band	4 th Band
Yellow	Violet	Black	Gold

(3 marks)

7. (a) Table 3 shows magnetic quantities. Complete the table.

Magnetic Quantity	Electric Quantity
Reluctance	
Permeability	
Flux density	

(3 marks)

- (b) Figure 3 shows the configurations of a magnetic circuit. The limb has a cross-sectional area of 10 cm^2 . The air-gap is 1.2 mm long. The coil has 500 turns and the flux in the air-gap is $1 \times 10^{-3} \text{ Wb}$. Determine the:

- magnetic flux density in the air-gap;
- magnetic field strength in the air-gap;
- mmf in the air-gap.

(6 marks)

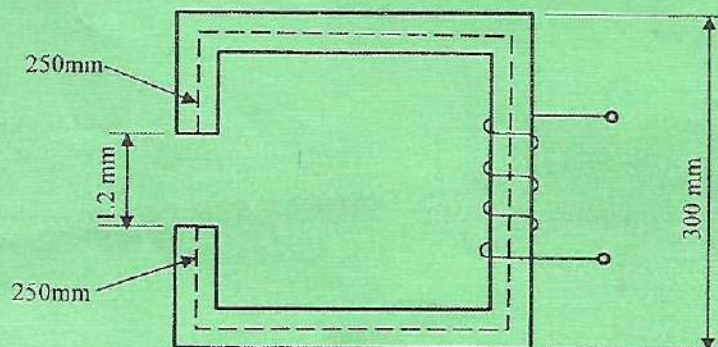


Fig. 3

- (c) **Table 4** shows values of flux density (B) and magnetic field strength (H) obtained from an experimental setup.

Table 4

Flux density B (Tesla)	1.0	1.2	1.3	1.35	1.42	1.45	1.5	1.55
Magnetic field strength, H (A/M)	200	450	700	1000	1500	200	3000	4500

- Plot the B - H curve using the values in **table 4**. (4 marks)
- (d) With the aid of a diagram, describe the construction of a single phase shell type transformer. (7 marks)
8. (a) Distinguish between the following giving an example in each case:
- N-type semi-conductor;
 - P-type semi-conductor. (4 marks)
- (b) With the aid of a diagram, explain the operation of a reverse biased P-N junction diode. (6 marks)
- (c) **Figure 4** shows a silicon transistor regulator. Determine the:
- load voltage;
 - load current;
 - current through R_1 . (6 marks)

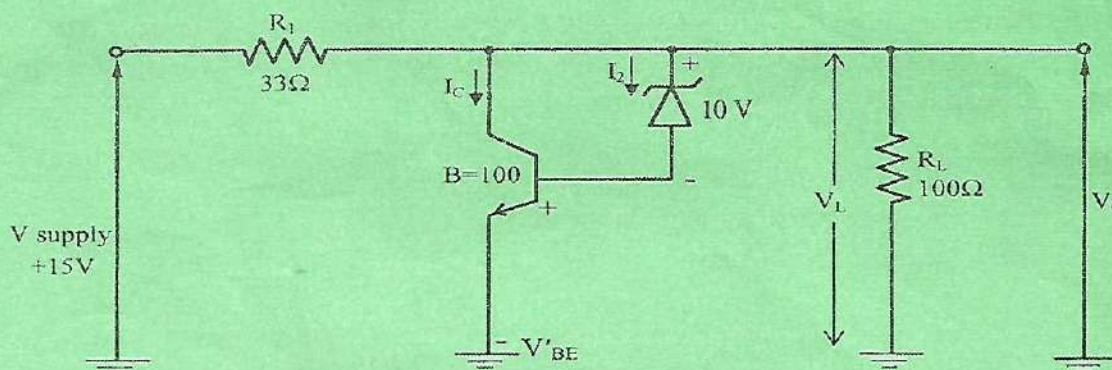


Fig. 4

- (d) Sketch the output signals of the following amplifiers for a sinusoidal input voltage:
- class A;
 - class B. (4 marks)

THIS IS THE LAST PRINTED PAGE.