

073105T4ARC

ARCHITECTURAL DRAFTSMANSHIP LEVEL 5

CON/OS/ARC/CR/04/5/A

INSTALL BUILDING FINISHES AND FITTINGS

Nov/Dec 2024



**TVET CURRICULUM DEVELOPMENT, ASSESSMENT AND CERTIFICATION
COUNCIL (TVET CDACC)**

**PRACTICAL ASSESSMENT
TIME: 5 HOURS**


INSTRUCTIONS TO CANDIDATE

1. You are required to perform the following practical tasks
 - i. *TASK 1: Set up and prepare surface for floor tile installation*
 - ii. *TASK 2: Mark 1200mm x 1200mm on the existing concrete floor*
 - iii. *TASK 3: Install the floor tiles as shown in the attached floor plan drawing A*
2. You are provided with the following resources:

Tools/Equipment	Materials
<ul style="list-style-type: none">• Cold chisel• Scrub brush• Brush comb• Serrated Trowel	<ul style="list-style-type: none">• Aprons• Lime• Grout• Gloves

<ul style="list-style-type: none">• Shovel• Masons Square• Masons Trowel• Tile cutter• Tile spacers• Paint bucket• Builders line• Spirit level• Setting out pegs	<ul style="list-style-type: none">• Water• Masking tape• Steel wool• Markers/pens• One (1) Wheelbarrow of Clean river sand• 20 pieces of ceramic tiles (300x300)
--	---

easyvet.com

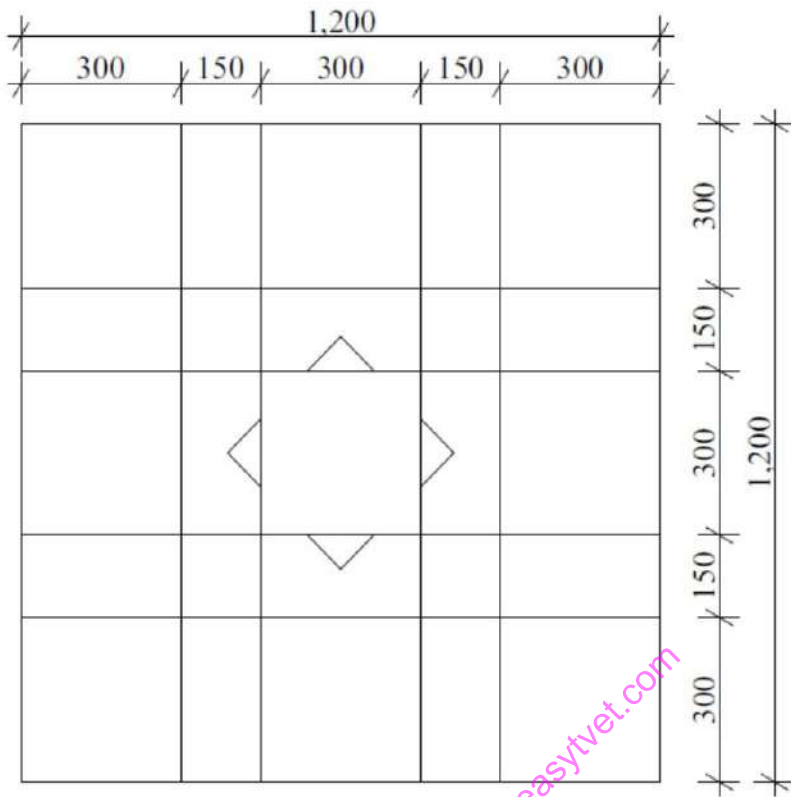

ADDITIONAL INFORMATION
The inclination angle of the center
tile is 45°.

DRAWING A

THIS IS THE LAST PRINTED PAGE