

1601/102

1602/102

APPLIED SCIENCE, ELECTRICAL
PRINCIPLES I AND ELECTRONICS

Oct./Nov. 2017

Time: 3 hours



THE KENYA NATIONAL EXAMINATIONS COUNCIL

CRAFT CERTIFICATE IN ELECTRICAL AND ELECTRONIC TECHNOLOGY
(POWER OPTION)
(TELECOMMUNICATION OPTION)

MODULE I

APPLIED SCIENCE, ELECTRICAL PRINCIPLES I AND ELECTRONICS

3 hours

INSTRUCTIONS TO CANDIDATES

You should have the following for this examination:

Answer booklet;

Non-programmable scientific calculator;

Drawing instruments.

This paper consists of THREE sections; A, B and C.

Answer ONE question from section A and TWO questions each from section B and C.

All questions carry equal marks.

Maximum marks for each part of a question are as indicated.

Candidates should answer the questions in English.

Take: $\epsilon_0 = 8.85 \times 10^{-12} \text{ F/m}$

$\mu_0 = 4\pi \times 10^{-7} \text{ H/m}$

This paper consists of 6 printed pages.

Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

SECTION A: APPLIED SCIENCE

Answer any **ONE** question from this section.

1. (a) (i) List **two** properties of acids.
- (ii) Differentiate between the following terms as used in chemistry:
- (I) atomic number and mass number;
- (II) period and group. (5 marks)
- (b) (i) State **two** forms of heat transfer. *Handwritten: Radiation, Convection*
- (ii) A steel boiler of mass 12 kg has 25 kg of water at 98° C. When 70 kg of water at 16° C was added to the boiler, a steady temperature of 38.5° C was obtained. The specific heat capacity of water is 4200 J/kg K. Determine the specific heat capacity of steel boiler. Assume heat loss to the surrounding is negligible. *Handwritten: $4200 \times 25 \times (98 - 38.5) = S \times 70 \times (38.5 - 16)$* (7 marks)
- (c) (i) State the energy conversion when:
- (I) a simple pendulum bob is made to swing;
- (II) solar battery is used to light a filament bulb. *Handwritten: AC to DC*
- (ii) A simple d.c generator produces 12000 joules of energy per minute. Determine its power. *Handwritten: $P = \frac{12000}{60}$ P = 200 watts* (5 marks)
- (d) Explain how a glass rod acquires electrostatic charges when rubbed against fur. (3 marks)
2. (a) (i) Define:
- (I) density;
- (II) relative density.
- (ii) The relative density of dam water is 1.13. Calculate its density in kg/m³. (3 marks)
- (b) (i) State **three** properties of electromagnetic waves.
- (ii) Draw a labelled diagram of the electromagnetic spectrum. (6 marks)
- (c) (i) Define the isothermal process.
- (ii) Sketch graphs to represent each of the following:
- (I) Boyle's law;
- (II) Charles's law. (5 marks)

- (d) A convex lens of focal length 10 cm is used to magnify an object placed at a distance 15 cm from it. Determine the:
- (i) image distance;
 - (ii) magnification.

(6 marks)

SECTION B: ELECTRICAL PRINCIPLES I

Answer any **TWO** questions from this section.

3. (a) State two:

- (i) advantages of an alkaline cell over lead acid cell.
- (ii) indications of a fully charged lead-acid cell.

(4 marks)

(b) Draw a labelled diagram of a leclanche dry cell.

(5 marks)

(c) Define the following terms as used in electrostatics:

- (i) electric flux density;
- (ii) relative permittivity.

(4 marks)

(d) Figure 1 shows a capacitive circuit:

(i) Show that the potential difference across C_1 is given by:

$$V_1 = \left(\frac{C_2}{C_1 + C_2} \right) V$$

(ii) Determine the capacitance of capacitor C_2 if $C_1 = 20 \mu F$ and total capacitance is $12 \mu F$.

(7 marks)

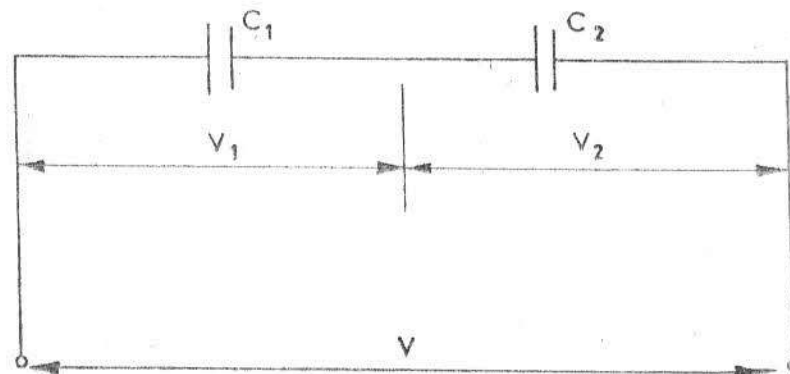


Fig. 1

$$\frac{1}{12} = \frac{1}{20} + \frac{1}{C_2}$$

$30 \mu f$

250 450
150 150 150

4. (a) State:
- (i) **three** factors that determine the force on a current carrying conductor in a magnetic field.
 - (ii) Faraday's laws of electromagnetic induction. (5 marks)
- (b) Outline **four** factors which affect the inductance of an inductor. (4 marks)
- (c) A flux of 20 mwb links with a 1200 turns coil when a current of 2A passes through the coil. Determine the:
- (i) inductance of the coil;
 - (ii) energy stored in the magnetic field;
 - (iii) average emf induced in the coil if current falls to zero in 120 ms. (7 marks)
- (d) Sketch the following transformer construction:
- (i) core type;
 - (ii) shell type. (4 marks)

5. (a) State:
- (i) **three** effects of an electric current and **one** application of each;
 - (ii) **two** types of resistors. (5 marks)
- (b) A wire of length 6 cm and cross-sectional area of 4 mm² has a resistance of 0.12 Ω. If the wire is drawn out until its cross sectional area is 2 mm², determine the new resistance of the wire. (4 marks)
- (c) Figure 2 shows an electric circuit. Show that by current division; $I_1 = \left(\frac{I_2 R_2}{R_1 + R_2} \right) I$.

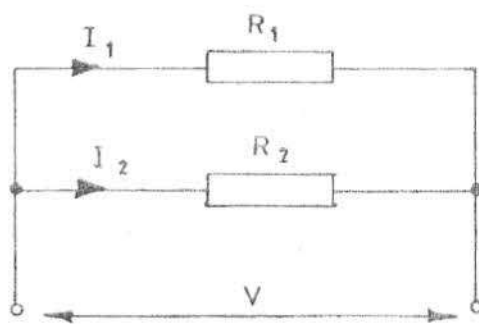


Fig. 2

(5 marks)

$$I_1 R_1 + I_2 R_2 = I_2 R_2$$

$$I_1 R_1 + I_2 R_2 = V$$

$$I_1 \neq I_2$$

$$I_1 (R_1 + R_2) = V$$

$$I_1 = \frac{I_1 + I_2 + (R_1 + R_2)}{R_2}$$

$$I_1 R_1 = \frac{V_1 R_1 + I_2 R_2}{R_1} \quad I_2 R_2$$

$$I_1 = \frac{I_2 R_2}{R_1 + R_2} I$$

- (d) Figure 3 shows an electric circuit. When switch S is closed, the reading on the voltmeter $V = 40\text{ V}$ and $V_2 = 15\text{ V}$. Determine the:
- reading on the ammeter;
 - value of R_2 .

(6 marks)

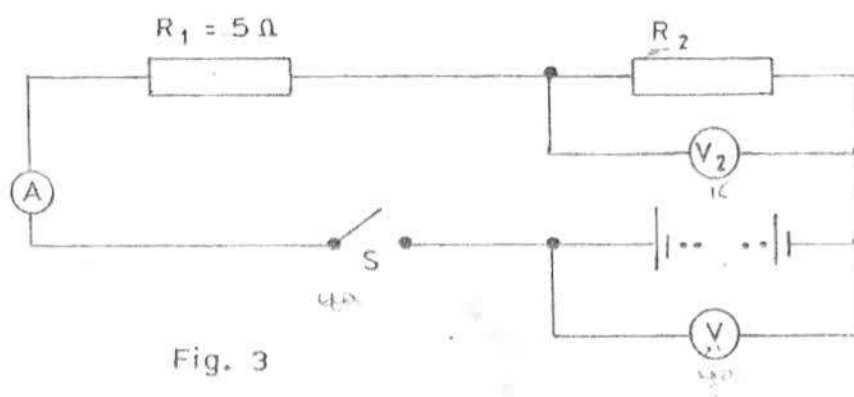


Fig. 3

SECTION C: ELECTRONICS

Answer any **TWO** questions from this section.

- Explain the term 'doping' as used in semi conductors. (2 marks)
 - With aid of a diagram, describe the operation of a NPN bipolar junction transistor. (8 marks)
 - Outline **three** tests that may be carried out on electronic components. (3 marks)
 - With aid of circuit diagram and voltage waveforms, explain the operation of a half wave rectifier circuit. (7 marks)
- State **four** types of negative feedback used in electronic amplifiers.
 - An amplifier has internal gain of 200. Determine the new gain if a negative feedback with feedback factor of 0.2 is introduced. (8 marks)

0+0=0
1+0=1
0+1=1
1+1=0

0 0 0 1 1 1 1
0 1 1 0 0 1 0

0 1 1 1 1 1 0
7
(8 marks)

- (b) (i) Determine the decimal number represented by $(0.10111000)_2$.
- (ii) Obtain decimal equivalent of hexadecimal number $(3A.3F)_{16}$.
- (iii) Add binary numbers 1111 and 1100.

(c) Simplify the following boolean expression:
 $(AB + C)(AB)$. (4 marks)

- 8. (a) (i) State **two** types of logic families.
- (ii) Figure 4 shows a three input OR gate. Draw its truth table. (10 marks)

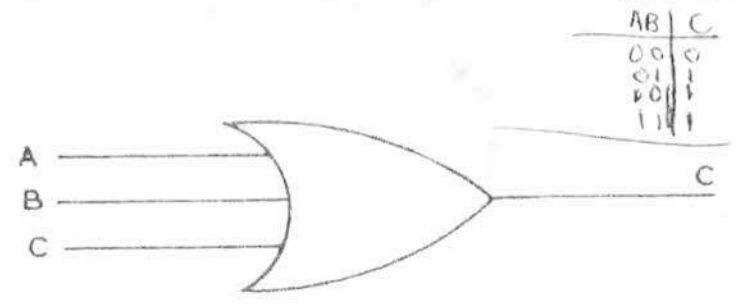


Fig. 4

- (b) Draw the:
 - (i) diagram of a T-type flip-flop; $T \rightarrow \text{flip-flop} \rightarrow \bar{T}$
 - (ii) truth table of the flip-flop in b (i). (5 marks)
- (c) (i) Sketch the ideal response curve of a low pass filter.
- (ii) Draw an R-C high pass filter network. (5 marks)

T | T̄
0 | 1
1 | 0

THIS IS THE LAST PRINTED PAGE.

1 1 1 1
1 1 1 1
0 1 1 0

0 1 1 0
0 1 1 1

0 1 1 1