

Name _____ Index No. _____ / _____

2920/203
OBJECT ORIENTED PROGRAMMING
July 2013
Time: 3 hours

Candidate's Signature _____

Date _____



THE KENYA NATIONAL EXAMINATIONS COUNCIL
DIPLOMA IN INFORMATION COMMUNICATION TECHNOLOGY

MODULE II

OBJECT ORIENTED PROGRAMMING

3 hours

INSTRUCTIONS TO CANDIDATES:

Write your *name* and *index number* in the spaces provided above.

Sign and write the *date of examination* in the spaces provided above.

Answer any **FIVE** of the following **EIGHT** questions.

All questions carry equal marks.

For Examiner's Use Only

Question	1	2	3	4	5	6	7	8	Total Marks
Marks									

This paper consists of 22 printed pages.

Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

1. (a) (i) Outline **three** characteristics of *member functions* as used in Object Oriented Programming languages. (3 marks)

- (ii) I. Define the term *operator overloading* as used in Object oriented Programming languages. (2 marks)

- II. State **two** rules applied when overloading an operator. (2 marks)

- (b) (i) Outline **three** examples of *derived data types* as used in Object Oriented Programming. (3 marks)

- (ii) Describe the term *memory leak* as used in Object Oriented Programming. (2 marks)

- (c) With the aid of a diagram, describe the flow of execution in a program developed using *procedural programming* approach. (4 marks)

- (d) Distinguish between the following C++ program statements:
`string myname("AnnJoy");`
`string myname="AnnJoy";` (4 marks)

2. (a) (i) Explain **one** advantage of using *free store* in a C++ program. (2 marks)

- (ii) State **two** disadvantages of using *modular programming* approach when developing a program. (2 marks)

- _____
- _____
- _____
- (b) The following is a C++ program segment. Use it to answer the question that follows.

```
#include<iostream.h>
class figure
{
public:
    int shape(int dim)
    {
        return (dim*dim*dim);
    }
};
int main ()
{
    figure cub;
    int dimension;
    dimension=0;
    cout<<"Enter the dimension : ";
    cin>>dimension ;
    cout << "The shape volume is: " <<
cub.shape(dimension)
<< endl;
    return 0;
}
```

Outline the output from the program segment when each of the following dimensions are inputted in the program.

- (i) 20 (2 marks)

- (ii) 5.5 (2 marks)

-
- (c) (i) With the aid of an example in each case, differentiate between *simple data type* and *user defined data type* as used in C++ programming. (4 marks)

- (ii) Given that the values of a,b,c, and d are 4,8,1, and 2 respectively, evaluate the following C++ statement.

$$X=(a\%d)+(b*c)\%a*d-c^3 \quad (4 \text{ marks})$$

easyvet.com

- (d) The following is a list of algebraic expressions. Use it to answer the question that follows.

$$N1=9+ 5y$$

$$N2=4+ 2y$$

$$N3=N1+ N2$$

Write a C++ program that accepts N1 and N2 and performs the addition operation through overloading the plus sign operator, the program should then display the value of N3. (7 marks)

- (b) (i) With the aid of an example in each case, differentiate between *enumerated* and *typedef* specifiers as used in C++ programming. (4 marks)

- (ii) Explain a circumstance under which a class inheritance would be used in Object Oriented Programming language. (2 marks)

- (c) (i) The following are operators used in C++ programming language.
|| & ++ :: <<
Arrange them in the order of their execution precedence. (2 marks)

- (ii) The following is a list of C++ constants.
Ox4b 'p' 3.14 30ul "Lengo" 85 Ox1f 9008
Categorize them as integer, character, string or floating point.
(4 marks)

- (d) Use figure 1 to answer the question that follows.

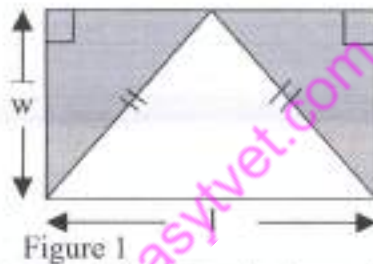


Figure 1

Write a C++ program to implement a base class named *dimensions*, with two data members called *length* and *width* and a member function called *display*. The program should have two derived classes named *triangle* and *rectangle* each with a data member named *units* and a member function called *setvalue*. The program should implement constructors to initialize the data members appropriately, calculate and display the area of the unshaded area.

(6 marks)

- (ii) State **one** reason that would justify overloading of an operator. (2 marks)

- (b) (i) Outline **two** circumstances that may lead to *file operation* failure during program execution. (2 marks)

- (ii) Mary would like to write a C++ program that outputs data on a file named *output.dat*. Write a C++ program statement that would be used

easyvet.com

- (b) (i) Outline a circumstance under which a *copy constructor* would be used in Object Oriented Programming language. (2 marks)

- (ii) Create a union in C++ programming language named employee which contains the following fields: Employee identification number, employee name, basic salary, hours worked, rate per hour and rate of taxation. (4 marks)

easyvet.com

(ii) With the aid of a diagram in each case, describe each of the following relationships as used in Object Oriented Programming language.

I. a-kind-of; (2 marks)

II. is-a. (2 marks)
